




INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP20 8QQ

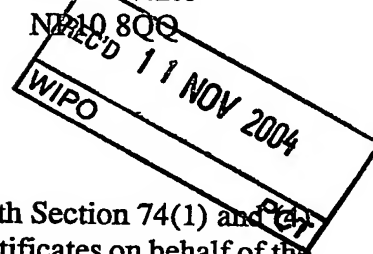


**PRIORITY  
 DOCUMENT**  
 SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (2) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

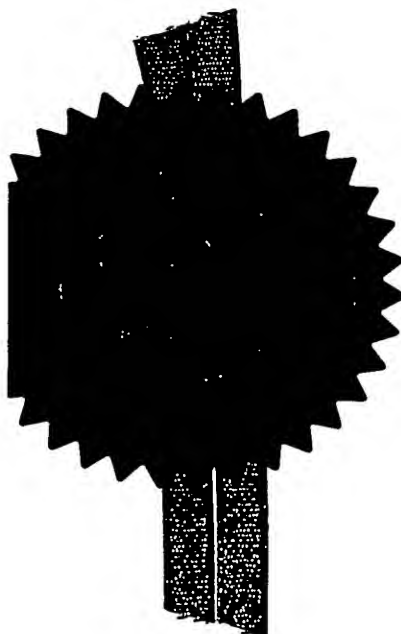

Signed

*Andrew Gervy*

Dated 28 October 2004

**BEST AVAILABLE COPY**

21 OCT 2003

RECEIVED BY FAX

The  
Patent  
Office

1/77

**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1.	Your reference	P3291GB00	2106103 E846156-1 002902 P01/7700 0.00-0324521.4
2.	Patent application number <i>(The Patent Office will fill in this part)</i>	0324521.4	21 OCT 2003
3.	Full name, address and postcode of the or of each applicant <i>(underline all surnames)</i>  Patents ADP number <i>(if you know it)</i>  If the applicant is a corporate body, give the country/state of its incorporation	MOVEVIRGO LIMITED New Portreach Road Redruth Cornwall TR16 4QL 723553400 GB	
4.	Title of the invention	MOULDING METHOD AND APPARATUS	
5.	Name of your agent <i>(if you have one)</i>  "Address for service" in the United Kingdom to which all correspondence should be sent <i>(including the postcode)</i>  Patents ADP number <i>(if you know it)</i>	WHITFIELD, Gillian Janette  K R Bryer & Co 7 Gay Street Bath BA1 2PH GB  10777502	
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and <i>(if you know it)</i> the or each application number	Country	Priority application number <i>(if you know it)</i>
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing <i>(day / month / year)</i>
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? <i>(Answer 'Yes' if:</i> a) <i>any applicant named in part 3 is not an inventor, or</i> b) <i>there is an inventor who is not named as an applicant, or</i> c) <i>any named applicant is a corporate body.</i> <i>See note (d))</i>	Yes	

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description	22
Claim(s)	5
Abstract	1
Drawing(s)	6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) One

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

*Roll Whitfield*

21 October 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

01225 428877

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**Patents Form 1/77**

DUPLICATE

**MOULDING METHOD AND APPARATUS**

5 The technical background of the present invention is the moulding of articles and particularly, but not exclusively the moulding of articles having a relatively small thickness in comparison with their dimensions in plan. Such articles may be generally planar but do not necessarily have to be.

10 The present invention also comprehends a method of moulding an article. The invention is particularly concerned with the moulding of signs and especially signs in which characters or other indicia are set in a supporting substrate so as to be visible on at least one face thereof.

15 One of the problems encountered with moulding processes is that bubbles of gas (in particular air) may form and/or become trapped within the material during casting or pouring and, if they are allowed to remain, can have a detrimental effect on the finished article. Such bubbles can, of course, escape if the moulding is carried out in an open mould (that is one in which the upper surface of the material being moulded is  
20 freely open to the atmosphere or, at least, to an atmosphere within the mould itself) but, where the upper surface of the moulded article contacts the mould or a mould insert, appropriate escape routes must be provided for any trapped gases.

When the article being moulded has a substantial bulk, outlets in the upper part of the  
25 mould can provide adequate venting but, when the article being moulded is relatively

thin and flat, effective venting is more difficult to achieve. In particular, small bubbles may be trapped between the upper surface of the moulded material and the mould face causing tiny cavities in this surface in the finished article. This problem is  
5 aggravated when the moulded article has a generally flat surface with inserts or cavities therein which are formed by inserts or mould parts on the bottom face of the mould where gas bubbles may become trapped during the filling of the mould.

According to one aspect, therefore, the present invention provides a method of  
10 moulding a generally flat article including the steps of:

providing a mould for the article,

locating or forming one or more inserts on a mould face which will define one surface of the moulded article,

introducing the material to be moulded into the mould,

15 providing attachment means with an irregular surface in contact with the material,

maintaining the mould in such an orientation while the material hardens and mechanically bonds to the attachment means, such that the said mould face is inclined to the horizontal at an angle at which the or each said insert is retained on the said face  
20 against slipping by friction, and

providing gas-outlet means from an upper part of the mould in the said orientation whereby to allow the escape of gases during the moulding process.

Thus, gas bubbles which might otherwise be trapped at the upper surface of the flat

article are vented by providing for the mould to be tilted so that even gas in contact with an upper face of the mould will rise automatically to the uppermost part of the mould where the bubbles will coalesce and can readily be vented through one or more  
5 ducts to the exterior. This, in itself, provides an effective way of moulding a flat article. The invention results, in particular, from a realisation that such a flat article can readily be moulded with inserts in a very simple and economical way if the inserts are simply placed (or formed in situ) on the lower mould face, provided the mould is not tilted to an angle at which such inserts would start to slip. The inserts are thus  
10 retained in position by friction, no other retainer means being required.

The mould inserts may be releasable from the moulded article, forming cavities therein, to allow articles having relatively complex inserts to be formed easily and economically and with the added advantage that the shapes of the inserts may readily  
15 be changed to allow a range of articles to be moulded without the expense of providing an entirely new mould for each variant. This not only allows signs of a given shape and size to be produced having different message-defining inserts but also signs of different size and shape by making the, or at least one, of the inserts a full mould thickness effectively to define an edge of the mould cavity. Alternatively, and  
20 in the particular application to which the invention is directed, inserts may be retained in the finished article: the retention may be achieved by the particular shaping of the insert which forms a key with the moulded article and/or by direct bonding of the insert and moulding materials and/or by an adhesive layer applied to the inserts before the filling of the mould with the material to be moulded and/or by other suitable

means. In the preferred application of the invention, direct bonding is employed.

5 The preferred use of the invention, to which reference will be made below without  
thereby departing from the generality of the invention, is in the moulding of  
underwater signs for which special plastics materials with anti-fouling properties are  
required. Such plastics are known in the art and do not form part of the present  
invention and will not, therefore, be specified in detail although, in general, it will be  
appreciated that they need to be waterproof, sufficiently tough and durable to  
10 withstand the battering and abrasion to which they may be subject, particularly in a  
submarine environment, and must not provide a surface on which underwater  
organisms, such as algae and shellfish, can cling as these would gradually obscure the  
signs. To this latter end, such plastics materials have very low friction surfaces and the  
surfaces must also be free from asperities.

15

Preferably, the moulding material is a silicone. The silicone material may comprise  
one or more of RTV 325, M polymer, XE15-4283, T4, TSE 3455, ELM 4541, RTV  
3040, PR910/1101, PR110/30, RTV 430, ELM 4514, although any other suitable  
silicone may be used.

20

In view of the above requirements, it has been found that underwater signs need to  
have very smooth surfaces, especially the surfaces bearing the message, and it is not  
acceptable for message elements to be applied to the surface, for example by painting  
because this results in surface discontinuities at which the aggressive attack of the

5

corrosive medium (i.e. seawater) can commence or, more importantly, allows organisms a foothold on which they can build. Thus, the moulding method of the invention is particularly suitable in that it allows inserts of one material, forming the elements of a message, to be moulded into a face of a body, or sign, so as to be substantially co-extensive with that surface when the body has cured, set or hardened.

In practice, the outer surfaces of the inserts must have similar properties to those of the main body of the sign. For producing signs for other purposes than submarine use the inserts could be of a different nature from the sign body, even as far as surface form is concerned, as well as being a different colour or being otherwise visually distinguishable from the body of the sign, for example by having a different surface texture.

In view of the properties required for submarine signs it would obviously be convenient to use substantially the same materials both for the body of the sign and for the message inserts (apart from a colour difference) but because the properties of the material are such that, once it has cured, it does not adhere to other previously cured bodies, even those of the same material it is not possible to pre-form the message inserts and place them in the mould for the sign body before casting the body material around them, nor is it possible to mould the sign body with appropriate cavities and subsequently cast the latter material into them.

It has been found, however, that there is a way by which it is possible to use anti-fouling plastics for the mould inserts provided they are used in a partially-cured state,



in which they have sufficient cohesion to retain their shapes but have not cured, set or hardened fully; in such a condition they can still bond to the body material as it cures.

Accordingly the invention further provides the steps of pre-moulding the inserts from  
5 a plastics material and using the pre-moulded inserts in a partially-cured state as the

inserts for the moulding of the finished flat article, the insert material curing and bonding to the body of the article during the curing of the latter.

10 In the case of a sign which is to display a message made up from several parts, whether these are characters, pictograms or other indicia, then each insert constituting part of the message must be placed in a specific spatial relationship with the other inserts on the mould face before the moulding operation. For this purpose, the indicia may be pre-made, separate from each other and from the mould for the sign body, and  
15 arranged manually or robotically on the mould face. More preferably, however, they are moulded directly on the mould face by means of auxiliary mould means that may be removed once the inserts have cured sufficiently to be substantially cohesive. More particularly, the inserts are preferably moulded in a single mould body formed so that they are at their correct mutual spacing and steps are taken to ensure that the body is  
20 appropriately located on the mould face so that the inserts are also located in their correct positions on that face in one simple operation. Conveniently the mould body is a template for the inserts and is placed on the mould face and its apertures filled with the raw insert material. In the case of the materials used currently for underwater signs, the raw material may be spread over the template, squeezed into the apertures

and the upper surface scraped off but any method of application suitable to a particular material involved may be used.

5 The template used in the method of the invention may be cut by a so-called 'template cutter' and, advantageously, this may be controlled by a computer which can be

programmed to determine the shape or shapes cut in the template so that a range of different messages may be formed. This enables the messages displayed by the signs produced by the method to be changed very readily, making short production runs an  
10 economic possibility.

It will be understood that the template, when placed on the mould face for forming the message must display the message in mirror-image for this to appear the right-way around to a viewer of the completed sign. It will also be appreciated that some indicia,  
15 such as a letter 'R' require an annular cut which would remove a central part of the letter. Bridges may be left to attach the centre to the periphery of the letter but, conveniently, temporary bridges may be applied to hold the centre in place while the template is transferred to the mould; this may be achieved for example by applying a transfer sheet to substantially the whole of one surface of the template to keep all such  
20 loose pieces in place during transfer.

In order to ensure that the template remains in its desired location on the mould face, it is preferably fixed in place by adhesive although it may be located or fixed by other means. The adhesives used in all stages may be releasable adhesives protected by

release films when not in use. Such adhesives are well known in the art.

Submarine signs as discussed above are intended for attachment to submarine structures, such as oil rig legs, and must, therefore, not only be capable of displaying a  
5 message but must also be attachable to the structure. It will be appreciated that, once

the sign material has cured, it can no longer be attached to a structure by adhesive because of its anti-adhesive properties. Holes could be formed so that it can be bolted to a structure but in such a case the bolts could themselves form sites for unwanted  
10 organic growth. The method of the invention therefore preferably includes a step of locating attachment means for attaching the finished article, or sign, to a support structure, in the mould for the flat article and moulding the article so that it is firmly attached to the attachment means when cured.

15 The attachment means may, for example, include members, such as straps, which project from the edges or rear face of the article when cured but, for simplicity, the attachment means comprise a sheet of material which is mechanically bonded to the back face of the article during moulding and which can itself be bonded to fixings or supports once the article is cured: a sheet of plastics material such as PVC, suitably  
20 treated on one face so as to adhere to the material of the article during curing, is preferred. Such a sheet of material may conveniently be placed on or in the mould part which will form the back face of the article before the mould is closed.

Preferably the attachment means is flexible.

Preferably the irregular surface of the attachment means comprises a mechanically scuffed surface. Alternatively, the irregular surface may comprise a chemically edged surface, a ribbed surface, an array of short hairs or bristles, an array of knitted loops, a  
5 velour, a looped Velcro-like surface, or the like.

Preferably the attachment means comprises an impermeable material, such as a vinyl material. Preferably the vinyl material is poly vinyl chloride.

10 The attachment means may comprise a combination of materials, for example, the attachment means may comprise nylon or velour-like hooks or loops with a pvc backing or another impervious backing that can be glued.

The mould for the flat article may be closed before or after filling with the material to  
15 be moulded depending on the nature of this material, the structure of the mould itself and the nature of any inserts. In use of the preferred material for forming an underwater sign, this has two constituents which must be mixed just before introduction into the mould but can be poured into the mould. Preferably the mixture is poured through an aperture provided in the mould in an upper position in its  
20 moulding orientation, the inlet aperture being separate from the vent aperture or apertures. Mixing may be carried out manually and/or in batches but such methods tend to be time-consuming and wasteful of materials. Hence a mixer/dispenser is preferably used which includes means for metering controlled amounts of the constituents into a vessel where they are mixed automatically to a more homogenous

standard than achievable manually and further includes means for delivering the mixed ingredients to the mould. Such automated equipment would even more preferably operate with continuous supplies of the constituents to the mixing vessel and deliveries to a succession of moulds on a production line.

5

Once a mould is filled and closed, it must be maintained at an angle to the horizontal to ensure that gas is vented therefrom and is not trapped as tiny bubbles at the upper surface of the moulded material, whether this is between the moulded material and a plastics insert or between the moulded material and the mould itself. As it is easier to

10

locate the inserts on a horizontal surface and, indeed, if inserts are moulded on the mould face by means of a template, this step must be carried out on a horizontal surface, the mould is preferably tilted to the curing position once the inserts have been located and any auxiliary mould parts have been removed and more usually, before filling with the material to be moulded.

15

According to another aspect of the invention, there is provided apparatus for moulding a generally flat article, comprising a shallow mould part with a flat mould face which will define an under surface of the moulded article, inserts or means for forming inserts for location on the said mould face, attachment means for mechanical bonding to the material, means for closing the mould, means for supporting the closed mould in an orientation in which the said mould face is inclined to the horizontal at an angle at which the or each insert is retained on the said mould face against slipping by friction, and means for venting gas from an upper part of the mould in the inclined

20

11

position of the mould.

5 The apparatus may include any features described above in relation to the moulding method of the invention. In particular, it preferably includes means for supporting the mould with the flat, insert support face in a substantially horizontal position for the location or forming of the insert or inserts thereon and for moving the mould to its inclined position for the curing of the moulded article. Preferably the support means comprise a support frame or table pivotable between the substantially horizontal and the inclined positions.

10

Such a frame or table is preferably pivotally mounted on a base so as to be supported at a convenient working height for pivoting about a horizontal axis. The mould may be fixed to or incorporated in the frame or table or releasable therefrom and possibly interchangeable with other such moulds. Moreover the support frame or table may be 15 pivotable in one or both senses from the horizontal position and may be fixable or lockable in any position, or in discrete positions, between the horizontal and a vertical position.

20

The mould itself preferably comprises two parts, a first, lower part defining the insert-support face, and a second upper part which closes over, and seals with, the lower part. In a preferred embodiment of the invention, the mould is vacuum-sealed. This enables the mould to be closed and sealed very quickly and efficiently while the opening of the mould is equally convenient.

One embodiment of the invention will now be more particularly described, by way of example, with reference to the accompanying drawings, in which:

Figures 1 to 6 show schematically successive steps in the production of a sign according to the invention, the dimensions being exaggerated for clarity of illustration;

5 Figure 7 is a schematic perspective view of part of equipment usable in the production of a sign according to the invention;

Figure 8 is an end elevational view taken in the direction of the arrow VIII of Figure 7, also showing an upper mould part of the equipment;

Figure 9 shows a detail of the equipment of Figure 7 on an enlarged scale; and

10 Figure 10 is a diagrammatic plan view of a variant of a mould part of the equipment.

With reference to Figures 1 to 6, these show various steps in the production of a sign, generally indicated 10 in the final Figure 6 of the series, particularly for underwater use.

Figure 1 is a perspective view showing a step in the production of a template 110 (Figure 2) formed from a sheet 11 backed by a coating of adhesive 12 and a release lining sheet 13. The outlines 14 of the characters, which will subsequently constitute the content of the sign, have been cut in the relative positions they are to occupy in the sign but in mirror image.

The character outlines 14 are cut by a sign cutter (not shown) preferably controlled by a computer such that the information displayed by signs made by the process can

13

readily be changed.

Once the outlines 14 have been cut, the pieces of sheet material 11a within the outlines 14 are removed, leaving apertures 14a, and an adhesive transfer sheet 15 is applied to the upper surface of the sheet 11 to hold loose parts surrounded by annular incisions, such as the centre 11b of the "O", in position: this condition is shown in section in Figure 2.

10 The release lining sheet 13 is next removed before the now-completed template 110 is placed in a first mould part shown at 16 in Figure 3 for the forming of the characters. The template 11, as shown, occupies the entirety of a flat base face 17 of the mould 16 surrounded by upstanding peripheral walls 18 but it may occupy only a small area of this surface, with appropriate positioning so that the characters are in a desired  
15 relationship with the edges of the finished sign.

Once the template is positioned, the various sheet parts 11, 11b adhere to the first mould part 16 by means of the adhesive coating 12 and the transfer sheet 15, which also has a releasable adhesive coating, is removed. This stage is shown in section in  
20 Figure 3: at this stage the base face 17 of the mould part 16 is horizontal although it could, alternatively be inclined to the horizontal as shown in Figure 5.

The characters are next formed by the filling of the template apertures 14a with black or other coloured material 19 which has appropriate anti-fouling properties when



hardened. The currently-preferred material is liquid and may be brushed, squeezed or sprayed into the template, or otherwise applied so that it fills the apertures 14a completely and the top surface is scraped flat.

5 The character material 19 is left to cure for a certain amount of time, sufficient to ensure that the characters will not deform either when the template 11 is removed or during the subsequent moulding process, described below, but not so much that they will not bond fully with the material subsequently co-moulded over them.

10 While the character material 19 is curing, a second mould part 20 (shown in the sectional view of Figure 4 together with the first mould part 16) is prepared by the positioning of a backing sheet 21 on its flat surface 22 which is of the same size and shape as the base face 17 of the first mould part 16; such that the face of the backing sheet 21 not in contact with the flat surface 22 is provided with Velcro-like knit loops.

15 The backing sheet 21 is currently preferably of plastics material, such as PVC, provided with Velcro-like knit loops on at least one surface, which may be secured in place by any suitable means depending on the nature of the mould part 20. In particular, the sheet 21 is currently secured by pins inserted through it into the mould itself but the use of vacuum clamping is envisaged. Additional backing sheets such as  
20 sheet steel are also envisaged and would be secured appropriately to the backing sheet 21.

Once the character material 19 has cured appropriately, the template 11 is removed and the second mould part 20 is closed over the first mould part 16, which at this stage

15

is still horizontal or substantially horizontal and the mould is sealed. The completed mould 16, 20 is then tilted to the position shown in cross-section in Figure 5, in which the base face 17 is inclined to the horizontal. The partially cured characters, here indicated 19a, 19b must be retained in their correct predetermined positions on the face 17 by friction and therefore the mould must not be tilted to a point at which they start to slip.

The mould cavity is next filled with uncured plastics substrate material 24 through an aperture 23 in an upper part of the mould, in the tilted position, while air escapes through outlets (not shown), also in the upper part, such that the mould can be filled without any air bubbles being trapped. The substrate material 24 is similar to the material 19 forming the characters 19a, 19b but of a different colour.

Once the mould is filled, the plastics substrate material 24 is allowed to cure at least to the stage at which it is cohesive before the mould is opened. The materials are selected such that, during the curing of the substrate material 24, the latter bonds both to the partly cured character material 19 and to the backing sheet 21. The three parts 19, 21 and 24 can thus be handled as a unit when the completed sign 10 is removed from the mould. The sign 10 is shown in perspective, the right-way up for viewing in Figure 6, it having been moulded upside-down in the steps described above.

In the completed sign 10, the faces of the characters 19a, 19b are flush with the face of the sign itself, there being no asperities on which organic growths could take hold. Moreover, when cured, the materials 19, 24 forming the front face of the sign resist

16

growth adhesion so that the message presented by the characters 19a, 19b will remain visible in the position of use in the long term.

5 With reference to Figures 7 to 9 of the drawings, equipment for moulding a sign 10 is shown generally indicated 30. Parts of the equipment equivalent to those shown in Figures 1 to 6 are indicated by the same references.

10 The equipment 30 thus includes a first, or lower, mould part 16 having a base, or moulding, face 17. The mould part 16 is in fact constituted by a sheet 31 of aluminium having rectangular section filets 32 of wood or other material secured to the face 17 along one longer and two shorter sides thereof to constitute the peripheral wall of the mould; the fourth side is left open.

15 In view of the thin flexible nature of the aluminium sheet 31, it is reinforced on the back by aluminium or mild steel angle sections 33 that extend parallel to the longer axis of the sheet 31. The angle sections 33 are in turn supported at each end by end-support angle sections 34 extending parallel to and beneath the shorter ends of the sheet 31.

20 Each end support section 34 is pivotally mounted at the upper end of a respective square-section upright 35 of a base frame generally 36 which supports the mould part 16 at a suitable height above the floor. The remaining structure of the base frame 36 will not be described as it is not relevant to the invention. What is relevant is that the pivot pins 37 attaching the mould part 16 to the uprights 35 are coaxial and parallel to

17

the longer axis of the aluminium sheet 31 to enable this to pivot about a horizontal axis parallel to this longitudinal axis. The pivot pins 37 are readily releasable to enable the mould part 16 to be released from the base 36.

5 As best seen in Figure 9, each end support section 34 of the mould part 16 also carries a semi-circular flange 38 which is dependent from it and lies adjacent the outer end

face of the respective upright 35. The inner face of each flange 38 carries two projecting stops 39, 40 spaced apart around its periphery, each for contacting a  
10 respective outer side face of the upright 35; each stop 39 in practice contacts its upright 35 in the horizontal, or substantially horizontal position, of the sheet 31 shown in Figure 7 to prevent the mould part 16 from pivoting beyond this position in one sense while the stops 40 contact the opposite faces of the uprights 35 to prevent pivoting in the opposite sense beyond the tilted position shown in Figure 8.

15

A further feature of the base frame 36 are turn-clamps generally indicated 41, one carried on the outer end face of each upright 35 adjacent the outer edge of the respective mould flange 38. The clamps 41 are of generally known type but, in general, comprise a bolt passing through the upright and carrying a clamping plate and  
20 turn bar which can be rotated manually to clamp the adjacent flange 38 between the clamping plate and the upright 35 and thereby clamp the mould part 16 in a desired position against pivoting.

With reference now to Figure 8 of the drawings, in particular, this shows the base

frame 36 and lower mould part 16 together with an upper mould part 20.

5 The mould part 20 has a similar structure to that of the lower mould part 16 in that it is constituted by a sheet 31a of the same size as the sheet 31, reinforced on the back by angle sections 33a. It does not, however, have additional angle-section end supports equivalent to the supports 34, nor filets 32 along three sides. Instead it has one or more filet pieces 32a along one of its longer sides which, when the two mould parts are brought together, in use, mates with that side of the mould part 16 which does not carry the filet 32.

10

When the two mould parts 16, 20 are brought together, the filets 32, 32a ensure that the mould faces 17, 22 of the two parts are spaced uniformly apart. Gaps are however left between the fillet pieces 32a along one longitudinal edge which is uppermost in the tilted condition of the mould shown in Figure 7.

15

For use of the mould part 20 for the manufacture of a sign as described above, the sheet 31a need not be of aluminium as it does not itself contact the material to be moulded: a sheet is placed over it before the moulding step. Instead a cheaper material may be used for the sheet 31a; a plastics coated chipboard edged with softwood is currently preferred for reasons indicated below.

20

In the embodiment shown in Figures 7 to 9, the two mould parts are clamped in this condition by clamping bolts (not shown) which pass through co-operating apertures (not shown) formed in the sheets 31, 31a and the filets 32, 32a.

In an alternative embodiment shown diagrammatically in Figure 10, which will be described briefly below, the two mould parts are vacuum-clamped together.

- 5 A final feature of the mould part 20 is an inlet duct 43 connected to an aperture (not shown) in its moulding face and which communicates with the interior of the mould when the two parts are brought together.

- 10 In use of the equipment 30, the mould part 16 is first arranged with its face 17 horizontal while the template described above is used to form characters on it and then removed. A suitably-treated sheet (not shown) is then applied to the mould face 22 of the second mould part 20 so as to overlap the edges and is pinned in place by drawing pins inserted through the plastic sheet into the softwood edging strips. The second mould part 20 is then applied and clamped to the first mould part 16 and the entire  
15 mould is tilted to the position shown in Figure 8.

- The plastics material for forming the body of the sign is mixed and poured into the mould cavity through the duct 43 very quickly thereafter to avoid the characters curing to too great an extent. Any air in the mould escapes through the gaps between the fillet  
20 pieces 32a along the upper edge of the mould. The mould may then be left for the plastics to cure before the completed sign is finally released from the mould.

With reference finally to Figure 10 of the drawings, this shows a variant of the mould part 16. In this embodiment the clamping bolts and their apertures 45 are replaced by

20

vacuum clamping means. For this purpose the filets 32 are widened and formed with a continuous channel 46 in their upper surfaces. The two ends 47 of the channel 46, close to the free ends of the filets 32, are closed but the channel communicates through  
5 an aperture 48 in its base with a vacuum source, not shown.

When the mould constituted by the parts 16 and 20 is closed, the channel 46 is evacuated so that atmospheric pressure clamps the two parts together. This provides a very much quicker method of clamping and releasing the mould parts than the use of  
10 clamping bolts.

#### EXAMPLE - Test of the Bonding Strength

Test samples were prepared sized 100mm x 150 mm and tested using a clamp to hold  
15 the free end of the silicone attached to the hook of the measuring scales. A further clamp was used to hold the free end of the backing sheet of the samples. The scales were then attached to a chain block and the scales tensioned until there was separation of the two materials. This initial separation is used as the maximum load. Once separation of the silicon from the backing sheet occurred, the chain block was stopped  
20 immediately, and the load left connected to the clamps until the downward movement of the scale stabilised. This reading was taken as the sustained load.

The results of the bonding strength tests are shown below:

Test No.	Backing	Silicone	Load to start peel	Sustained Load
1	PVC	Wacker 'm' polymer 355Z	10 kg	8 kg
2	PVC	Wacker 'm' polymer 355Z	11kg	8.5 kg
3	Aplix <sup>RTM</sup> 200	RTV 430	16kg	15 kg
4	Aplix <sup>RTM</sup> 200	RTV 430	16 kg	15 kg
5	VELCRO <sup>RTM</sup> 3607 VELOUR	RTV 430	17 kg	16.5 kg
6	VELCRO <sup>RTM</sup> 3607 VELOUR	RTV 430	16 kg	15.5 kg

PVC – Poly vinyl chloride

5

Aplix<sup>RTM</sup> 200 – commercially available polyamide knit loop material (available from APLIX).

Velcro<sup>RTM</sup> 3607 velour – commercially available vinyl laminate with a knit loop surface.

10

Samples 1 and 2 comprise a silicone moulding chemically bonded to a PVC backing sheet. Samples 3 and 4 comprise an RTV 430 moulding compound mechanically bonded to a vinyl backing. Samples 5 and 6 comprise an RTV 430 moulding compound mechanically bonded to Velcro<sup>RTM</sup> velour, that is knit loops provided on a vinyl backing sheet.

15

As can be seen from the above table, samples 3 to 6 showed superior bonding strength



when compared with samples 1 and 2. The mechanical bonding of the silicone  
moulding compound to the knit-loops on the backing sheet provides improved bond  
strength properties to the final moulded product when compared with the bonding  
5 strength properties of final moulded products relying on a chemical bond between the  
silicone moulding product and the backing sheet to provide bond strength.

10

15

20

25

30

35

40

45

# CLAIMS

- 5 1. A method of moulding an article having a relatively small thickness in relation to its dimensions in plan including providing a mould for the article,  
locating or forming one or more inserts on a mould face which will define a part of the surface of the moulded article,  
introducing the material to be moulded into the mould,  
10 providing attachment means with an irregular surface in contact with the material,  
maintaining the mould in such an orientation while the material hardens and mechanically bonds to the attachment means, such that the said mould face is inclined to the horizontal at an angle at which the or each insert is retained on the said face  
15 against slipping by friction during the hardening of the material, and  
providing gas-outlet means from an upper part of the mould in the said orientation to allow the escape of gases during the moulding process.
- 20 2. A method according to Claim 1 wherein the attachment means is a sheet.
3. A method according to Claim 1 or Claim 2 wherein the attachment means is flexible.
- 25 4. A method according to any preceding claim wherein the irregular surface of the attachment means comprises a mechanically scuffed surface.

5. A method according to any one of Claims 1 to 3 wherein the irregular surface of the attachment means comprises a chemically etched surface.

5 6. A method according to any one of Claims 1 to 3 wherein the irregular surface of the attachment means comprises a ribbed surface.

7. A method according to any one of Claims 1 to 3 wherein the irregular surface of the attachment means comprises an array of short hairs or bristles.

10

8. A method according to any preceding Claims wherein the attachment means is provided with knit loops.

9. A method according to Claim 8 wherein the attachment means has a looped  
15 Velcro-like surface.

10. A method according to Claim 8 wherein the attachment means is a velour.

11. A method according to any preceding claim wherein the attachment means  
20 comprises an impermeable material.

12. A method according to any preceding claim wherein the attachment means comprises a vinyl material.

25

13. A method according to Claim 12 wherein the vinyl material is poly vinyl chloride.

14. A method as claimed in any preceding claim, in which, during the introduction  
5 of the material to be moulded, the mould is supported in an orientation in which the said mould face is substantially horizontal and, after the introduction, is moved to an inclined orientation at an angle at which the or each insert is retained on the mould face against slipping by friction, for the article to set, cure or harden.

15. A method as claimed in any preceding claim, in which at least one insert is  
10 retained in the finished moulded article.

16. A method as claimed in Claim 15, in which the said at least one insert to be  
15 retained is a partially-cured moulded article which sets, cures or hardens and bonds to the moulding material as this latter itself sets, cures or hardens.

17. A method as in Claim 16, in which a plurality of the said inserts are moulded  
20 in a single mould body so shaped that the inserts have a predetermined spacing and orientation, which is maintained as the inserts are transferred to their position on the said mould face.

18. A method as claimed in Claim 16 or Claim 17, in which the or each insert to be retained is moulded directly on the mould face by means of subsidiary mould means which are removed when the insert has cured sufficiently to be at least

substantially cohesive.

19. A method as claimed in Claim 16, in which the subsidiary mould means  
comprise a template having cut-out portions defining the or each insert, and material  
5 for forming the insert is applied to the apertures in the template.

20. A method as claimed in Claim 19, in which the template is placed in contact  
with the said mould face and the material for forming the insert applied thereto by  
spatula and scraped off level with the surface of the template.

10

21. A method as claimed in Claim 17, in which a transfer sheet is applied to a  
partly cured insert to maintain the component parts thereof in a predetermined relative  
orientation and/or spacing upon transfer from the said mould body to the said mould  
face.

15

22. A method as claimed in Claim 18, in which the template is cut by a cutter  
controlled by computer means which is programmable to determine the shape or  
shapes of the cut-out portions to be changed to form different inserts.

20 23. Apparatus for moulding an article having a relatively small thickness in  
relation to its dimensions in plan comprising a shallow mould part with a flat mould  
face which will define an under surface of the moulded article, inserts or means for  
forming inserts for location on the said mould face, attachment means for mechanical  
bonding to the material, means for closing the mould, means for supporting the closed

27

mould in an orientation in which the said mould face is inclined to the horizontal at an angle at which the or each insert is retained on the said mould face against slipping by friction, and means for venting gas from an upper part of the mould in the inclined position of the mould.

5

24. A method as hereinbefore described and with reference to Figures 1 to 10.

25. An apparatus as hereinbefore described and with reference to Figures 1 to 10.

**ABSTRACT**

5

**MOULDING METHOD AND APPARATUS**

- A method of moulding an article having a relatively small thickness in relation to its dimensions in plan including providing a mould for the article,
- 10        locating or forming one or more inserts on a mould face which will define a part of the surface of the moulded article,
- introducing the material to be moulded into the mould,
- providing attachment means with an irregular surface in contact with the material,
- 15        maintaining the mould in such an orientation while the material hardens and mechanically bonds to the attachment means, such that the said mould face is inclined to the horizontal at an angle at which the or each insert is retained on the said face against slipping by friction during the hardening of the material, and
- providing gas-outlet means from an upper part of the mould in the said
- 20        orientation to allow the escape of gases during the moulding process.

An apparatus for moulding an article using the above method is also described.

1/6

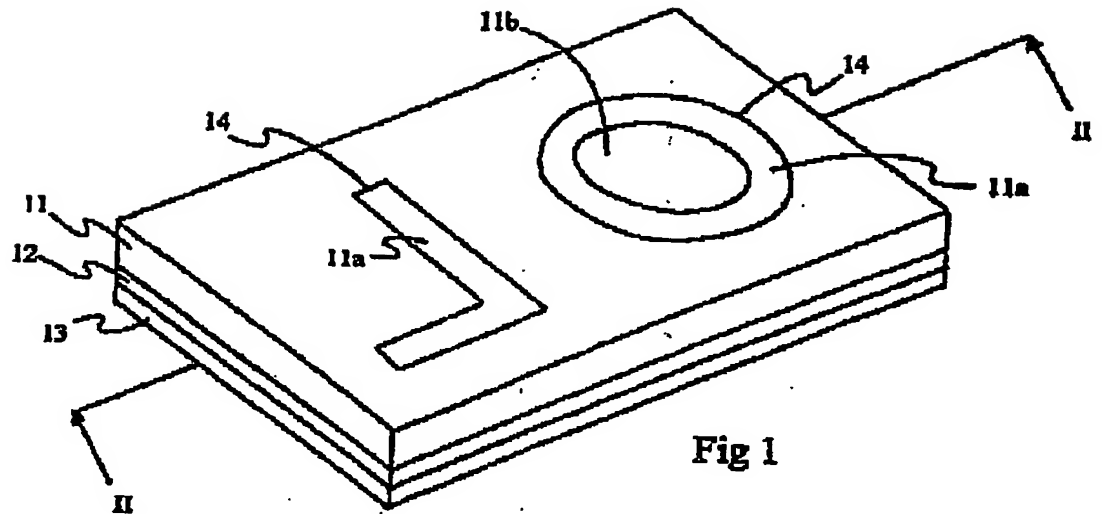


Fig 2


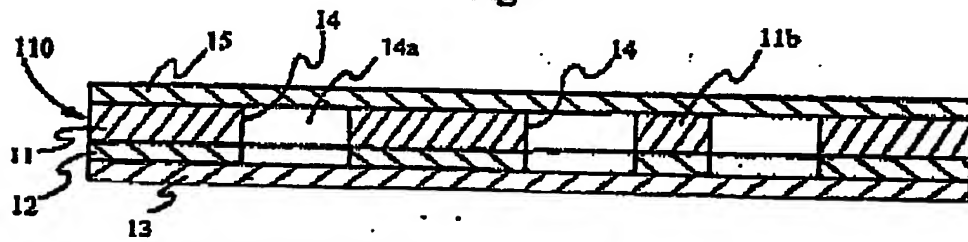


Fig 3



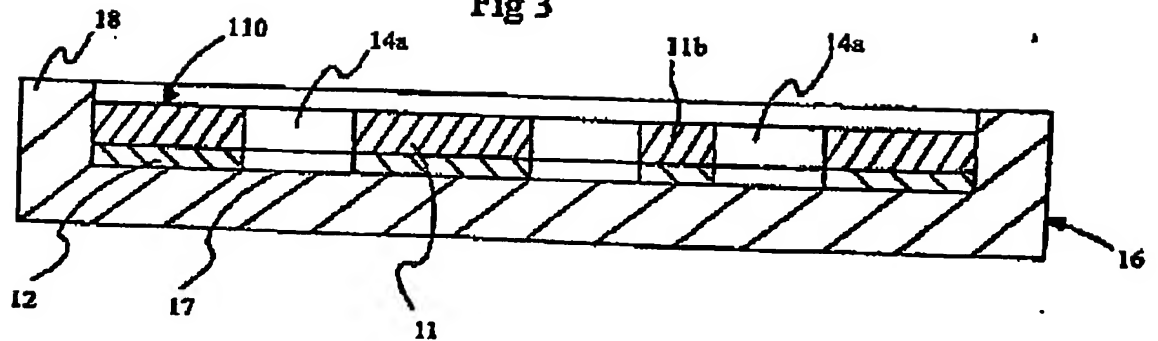

2/6

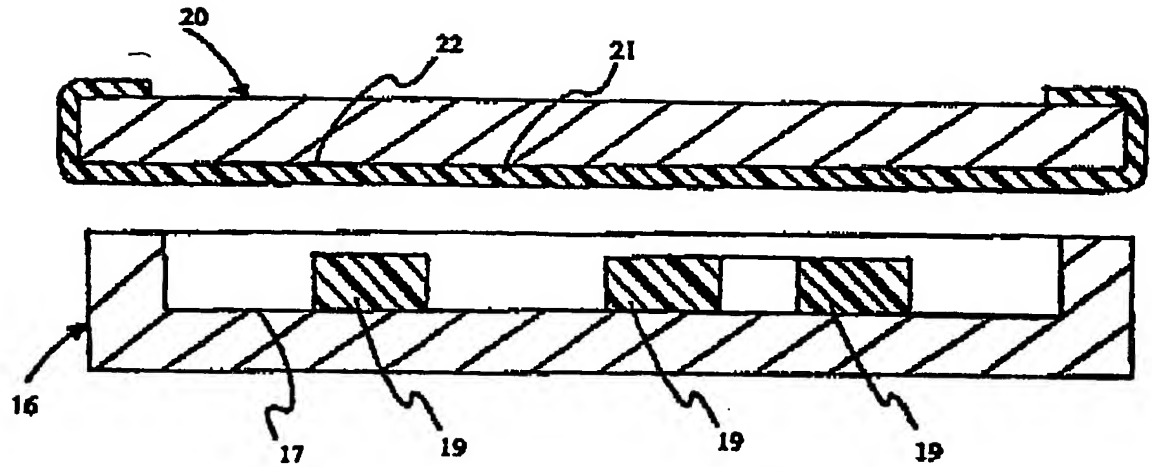


Fig 4

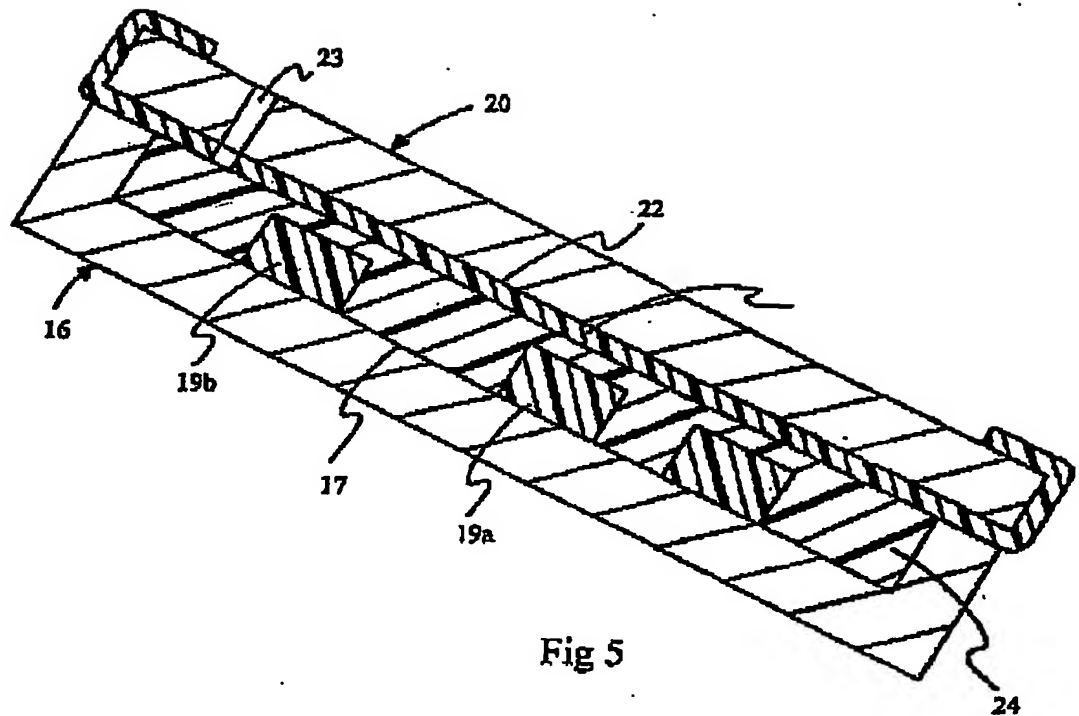


Fig 5

3/6




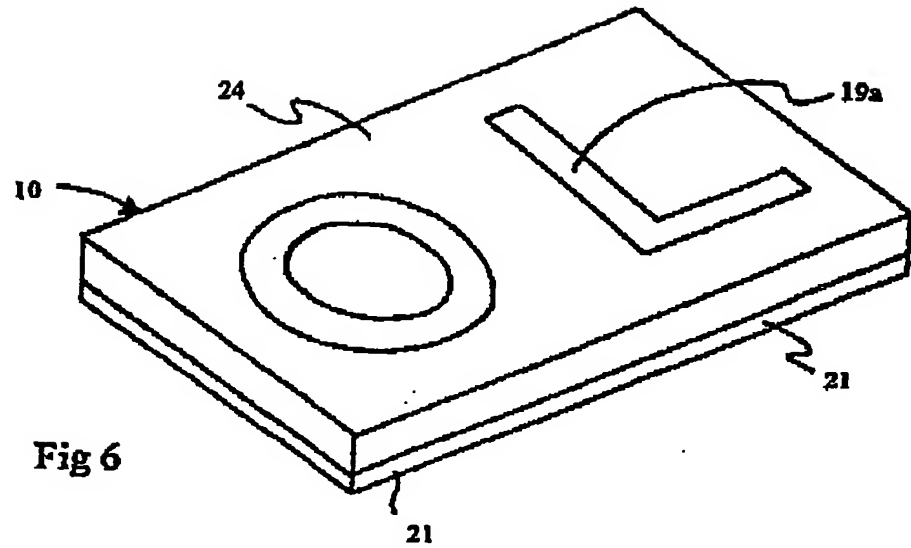


Fig 6

4/6

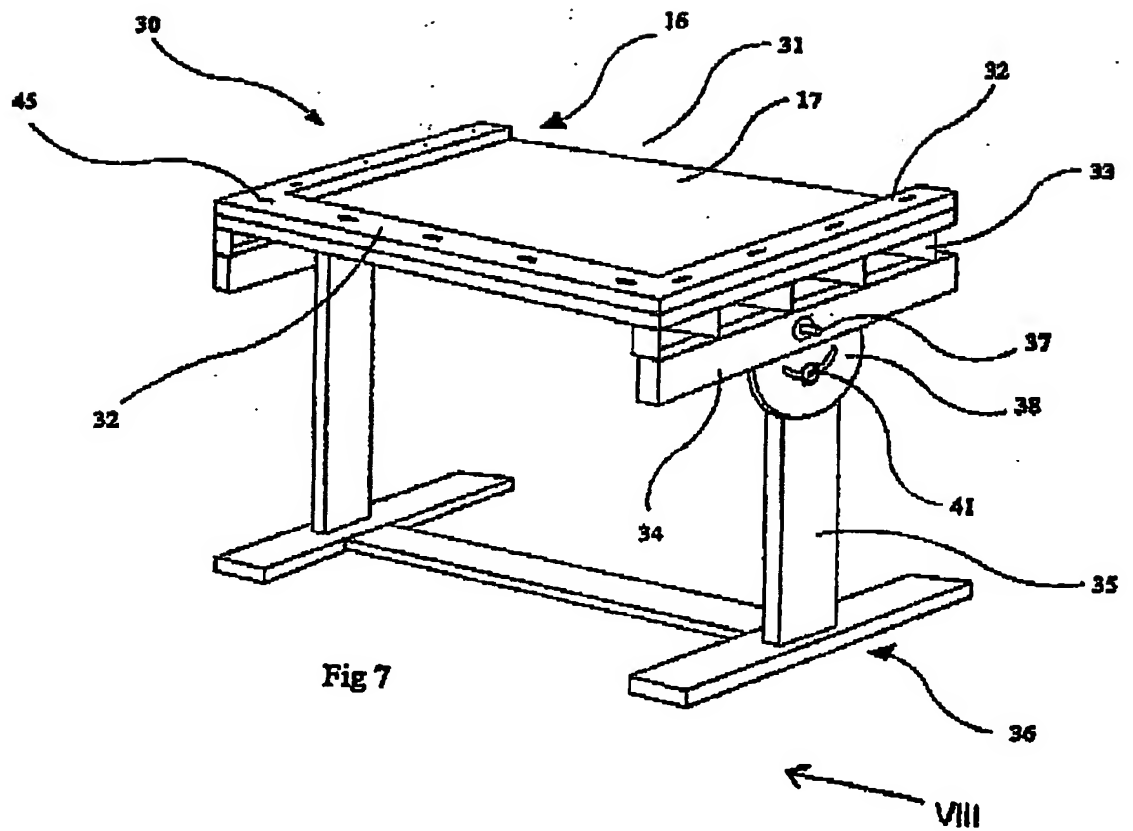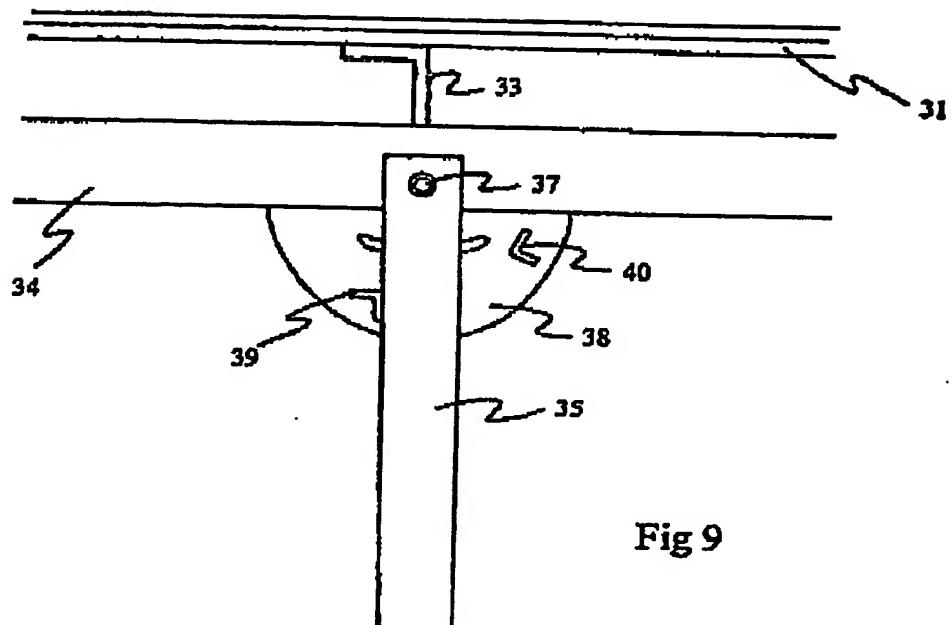

5/6

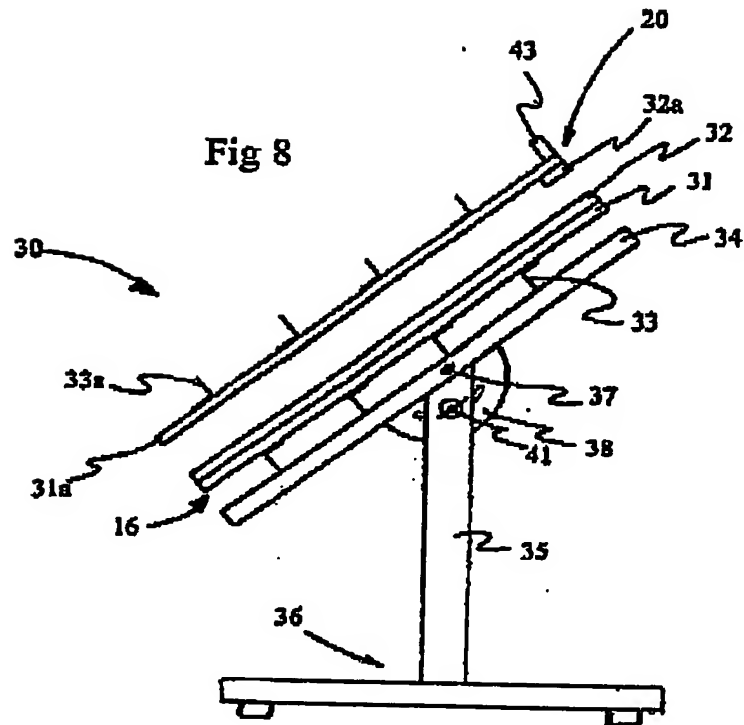

6/6

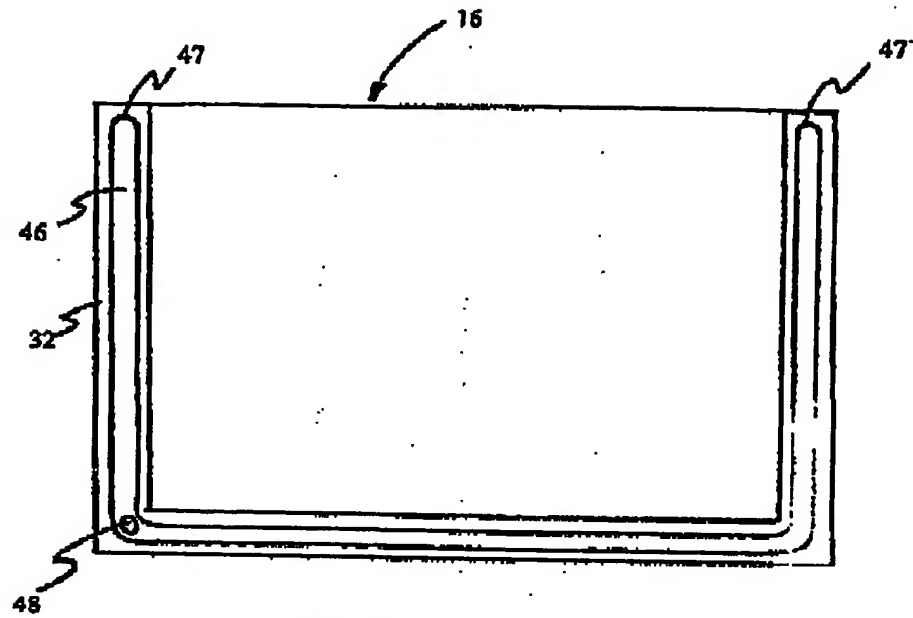


Fig 10

PCT/GB2004/004440



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**